

Hex Drive Hubs

Standard
Duty 2"

High Torque
2" FS Hub
for 3.50
Tube

Standard
'Duty 2.50
Hex 3 ¾
Tube
Augers

High Torque
2.50 FS
Hub for 4"
Tube
Augers

Standard
Duty 2.62
Hex 3 ¾"
Tubes

High Torque
2.62 FS
Hub for 4"
Tube
Augers



Stinger Series BT500 Bullet Pilots

- BT500 L 1 3/4" Square Drive
- Pat-Pending
- BT500 S 1 3/4" Square Drive.
- Pat-Pending




BT700 6T Foundation Pilot

- Features 7" Diameter -6 HD31 Teeth, Flow Through Body Design. Pat Pend




Digger Derrick Auger Teeth For Shank Plates

1650



1652



1656



1658



Fits Std
Utility
Shank
Plates

Pin On Pilot Bits & Subs For 1 3/4" Square Drive

BT-500S

B1.75X3.25

BT-500L

B1.75X4.00

MM2-HD

1 3/4"
Square
Drive
Pilots




Digger Derrick Rock Tooling is manufactured with industry leading 4" OD X 3/8" Wall Tubing that's 85,000 ultimate yield and standard upper flight is 3/8" thick. Lower flight is 1" Pat - Fail Safe Hex – Hubs Eliminates Butt Weld on Drive Hub..

Single Row
Heavy Duty
Bullet



DBL ROW
Heavy Duty
Bullet
Auger

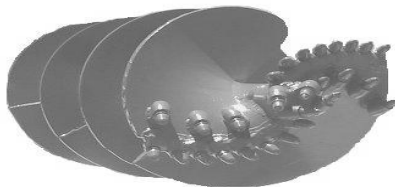

Progressive
DBL Cut
Rock Auger



Spiral Cut
Rock Auger



Pressure Auger Tooling

Key Features include:

36" of heavy $\frac{3}{4}$ " wall barrels.

Vented Sides Walls aids and assists in fine retention and core removal.

Unique top frame provides maximum strength for torsional and crowd distribution while reducing wt.

Teeth
Available .765 Super Tooth have $\frac{1}{2}$ " Sharp Super Duty Carbide & Long Ring Retentions and Field Serviceable Straight Shank Block.

Or

1.00 Super Tooth Shank Tooth and Block for large foundation use.

Bullet Tooth Core Barrel



Digger Derrick Pilots And Subs For Standard MD Augers

FH 205 Heat
Treated Alloy
Steel



FH 205C
Heat Treated
Alloy Steel



P1650/56
Heat Treated
Alloy Steel



PA 183L
Heat Treated
Pilot Adapter



Digger Derrick MD Augers With 3/8" Upper Flighting and Industry Leading 4" x 3/8" 85,000 Ultimate Yield Tube Shaft. Pat - Fail Safe Hex – Hubs Eliminates Butt Weld on Drive Hub..

Available
from 9" to
48" Dirt or
Carbide.

Belltec
Standard
Length is
104" OAL

Upper
Flighting
is 3/8" @
60" of
carrier
flighting.

Custom
Lengths
are
available.

